


# HSP403810L

POWER INDUCTORS FOR SURFACE MOUNTING

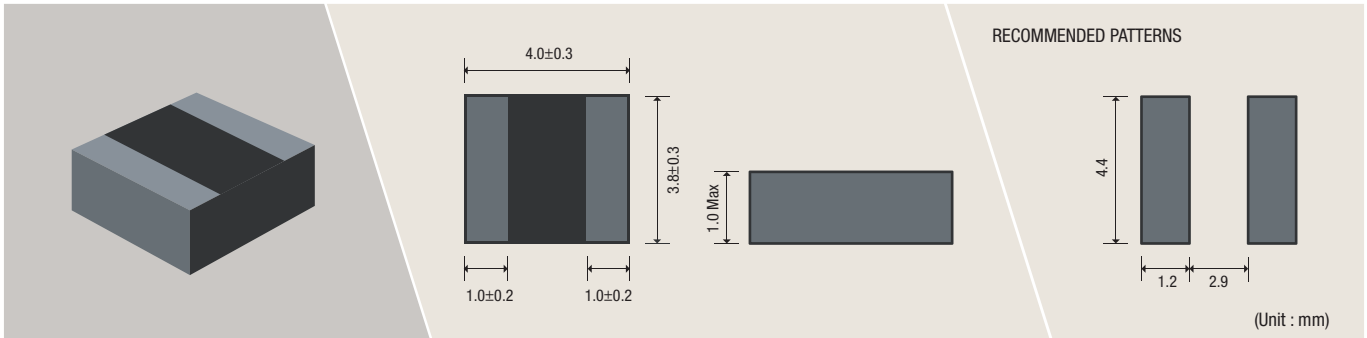

## FEATURES




- Magnetic alloy power choke coil.
- Miniature size(4.0×3.8) and low profile.
- Magnetic shielded.
- Low acoustic noise and high efficiency.
- Halogen Free and RoHS compliant.
- Low DCR






## SPECIFICATION

Part. No.	Inductance @1MHz [μH]	DC Resistance [mΩ]Typ(Max)	Saturation Current <sub>Isat</sub> 30% [A] Typ.	Rated Current <sub>I<sub>dc</sub></sub> [A] Typ. (ΔT = 40°C)
HSP403810LR47	0.47 ± 20%	17(20)	8.20	6.10
HSP403810L1R0	1.0 ± 20%	34(40)	7.00	4.20
HSP403810L1R5	1.5 ± 20%	46(55)	5.50	3.60
HSP403810L2R2	2.2 ± 20%	52(62)	4.50	3.40
HSP403810L3R3	3.3 ± 20%	75(90)	3.80	2.80
HSP403810L4R7	4.7 ± 20%	130(155)	3.00	2.20
HSP403810L6R8	6.8 ± 20%	175(210)	2.40	1.80
HSP403810L100	10.0 ± 20%	250(300)	1.80	1.50


- Inductance is measured with the 4294A(AgilentTechnologies) or equivalent. (@1 MHz, 0.1Vrms)
- DCResistance is measured with the Digital Multimeter 3541(Hioki) or equivalent.
- Maximum allowable DC current is that which caused a 30% inductance reduction from the initial value, coil temperature to rise by 40°C whichever is smaller. (Ambient temp.20°C)

## ELECTRICAL CHARACTERISTICS

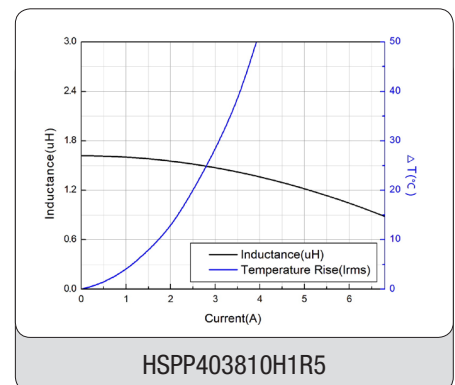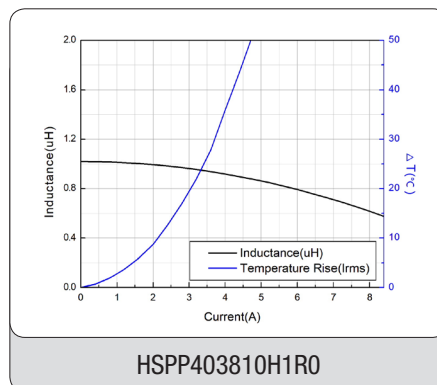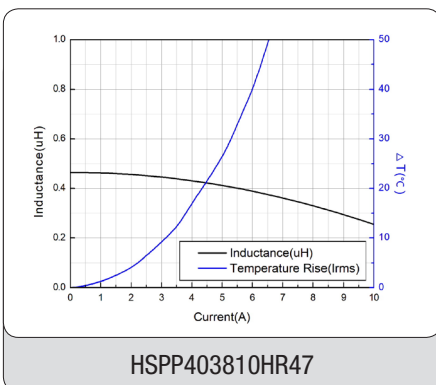

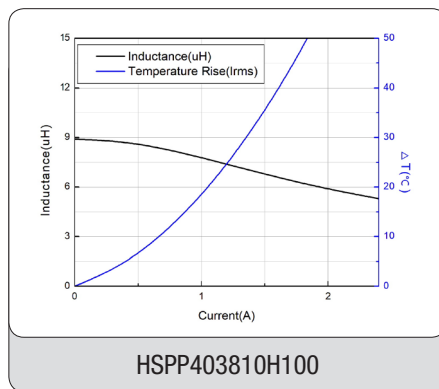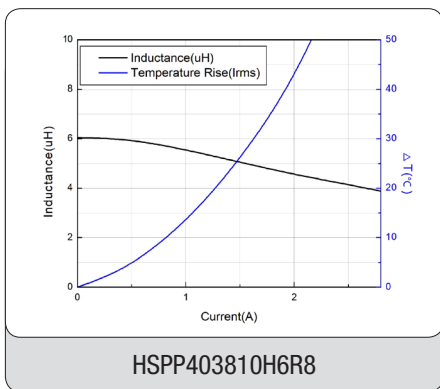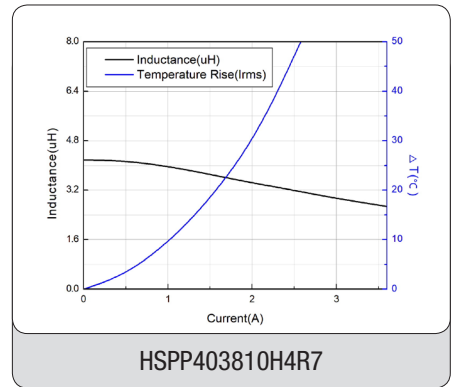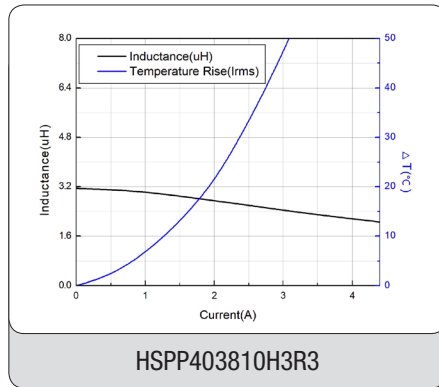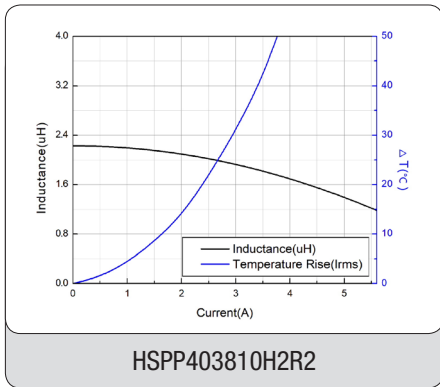

## REEL TAPE SPECIFICATION

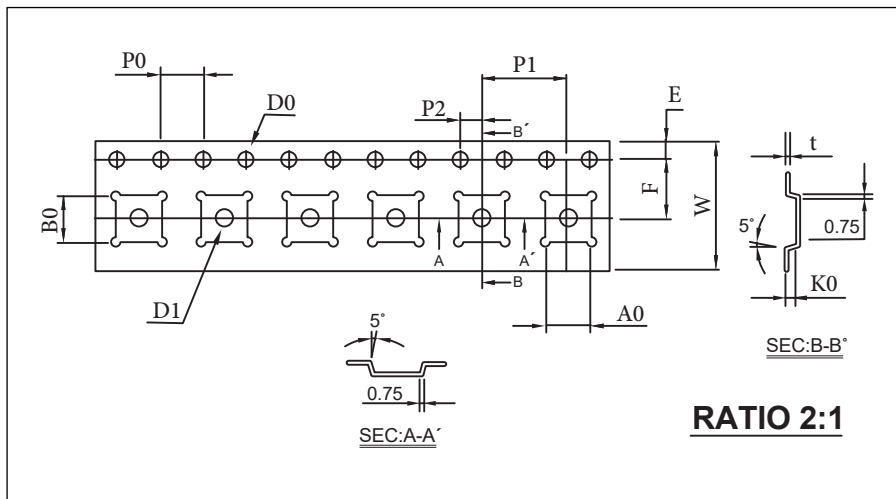

Item	Specification	Tol.(+/-)
W	12.00	± 0.30
E	1.75	± 0.10
F	5.50	± 0.10
D0	Φ1.50	+ 0.10, - 0
D1	Φ1.00	± 0.10
P0	4.00	± 0.10
P1	8.00	± 0.10
P2	2.00	± 0.10
P0x10	40.00	± 0.20
T	0.30	± 0.05
A0	4.15	± 0.10
B0	4.15	± 0.10
K0	0.97	± 0.10